




Bofloor
durable quality

BoLock BF7

Quality tiles suitable for heavy loads.

This all-round solution solves all your flooring problems. The tiles cover cracks and imperfections and are therefore perfect for damaged, damp or soiled subfloors. The perfect solution for all locations that are unsuitable for other flooring systems or where the floor is subject to heavy loads.

The snap connection enables the tiles to be placed randomly resulting in additional stability and significantly less cutting waste.

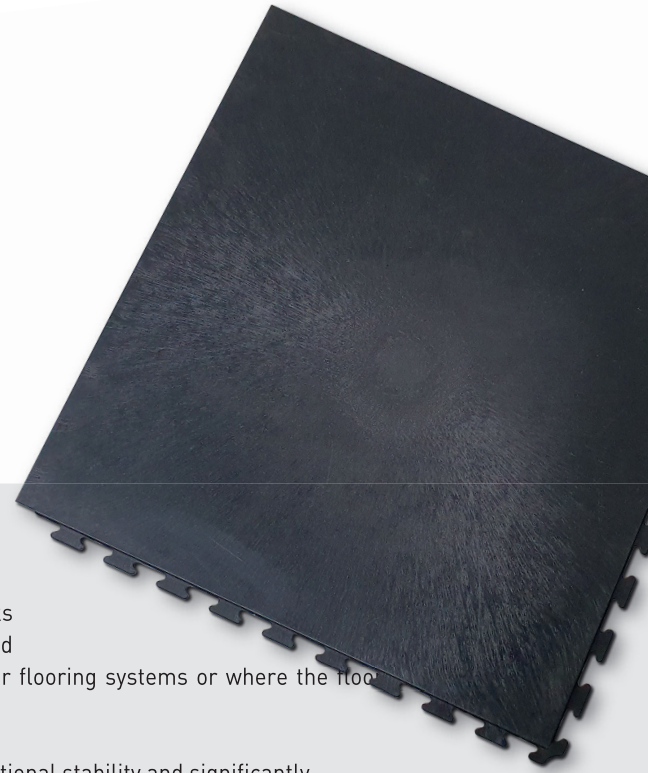

Loose lay installation

These 7 mm tiles are for loose lay installation. In some cases, such as locations with lots of direct sunlight, heavy forklift traffic or impermeability requirements in catering kitchens, it is recommended to glue the tiles to the subfloor with 2K-PU glue. Another method to ensure that the tiles stay in place under extremely heavy loads is to use a fixative. The tiles are properly fixed to the floor, yet can easily be picked up.

Properties and benefits

- Can be laid on top of the existing subfloor (including soiled or defect floors)
- Can be laid randomly
- No preparation or building work required
- Ready to use and to be placed under heavy loads
- No or minimal business interruption
- Suitable for extremely heavy loads such as fork lift trucks or stackers
- Easy to make watertight (without the need for special tools)
- Removable and easy to move
- Excellent sound insulation and ergonomic
- Non-slip (R12)
- Easy to clean and maintain
- A perfect alternative for ceramic tiles, coatings or concrete paint

Applications

- Garages
- Classic car storage
- Warehouses
- Workshop
- Small catering kitchens
- Canteens
- Aircraft hangars
- Factories
- Printing businesses
- Machine factories
- Manufacturing companies
-

Watertight

These tiles have a unique snap connection and are virtually watertight. 100% impermeability can be achieved without the use of special tools. Simply apply MS polymer kit or a cold-welding product to make the floor watertight.


Technical data

Connection	snap connection (hidden joint)
Dimensions	500 x 500 mm
Thickness	7 mm
Weight	2,5 kg per tile
Material	Recycling PVC (manufactured conform REACH- and CE standards)
Surface structure	GL : Flow line
Toughness	92 Shore A
Non-slip	R12
Fire performance	B1fl-S1 Does not readily catch fire
Underside	Smooth
Suitable for underfloor heating	Ja
Thermally weldable	BoLock BF7 : Not weldable (cold-welding product only) BoLock BF7 Weld : Weldable with 5mm welding rod
Accessories	Transition profile, skirting


Plasticizer exudation

Rubber tyres or caps can cause staining to grey synthetic tiles, as can herbs or certain food colourings.


Colors



black



graphite



grey

More information

If you would like more information about us or our products, please do not hesitate to contact us on telephone number (+31)045-5322277 or send us an email: info@bofloor.biz



Havikweg 17
6374 AZ Landgraaf (NL)

Industrial area Abdissenbosch
Parkstad 3381

t 0031-455322277
e info@bofloor.biz

www.bofloorindustrialflooring.com