



Bofloor
durable quality

TaraLock

Design tile for commercial applications.



The appearance of a floor has an enormous impact on the customer's or visitor's well being. The right floor makes a positive contribution to this and the TaraLock design tiles were designed with this in mind.

Installation with minimum downtime or business interruption.

The interlocking tiles can be installed quickly and easily. There is minimum (or no) disruption to the day-to-day operations during floor refurbishment. The 610x 610 mm synthetic tiles with stone or concrete look can be walked or driven on straightaway (even during installation). If necessary, the installation can also be done in stages and this is a huge advantage compared to ceramic tiles or coatings. These PVC tiles were especially designed to withstand visitors, shopping trolleys and pallet stackers.

Sound insulation and maintenance

The combination of a 7.5 mm thick PVC carrier material with a 2.5 mm design-top layer ensure optimum contact sound insulation. These properties plus the fact that there are no seams ensure that there is virtually no noise or rattling when shopping trolleys and carts are pushed along the floor. Unlike ceramic tiles or coatings, these tiles will not crack or tear. Stains can be removed quickly and easily thanks to the closed surface structure with PU coating. The usual tools are used for cleaning and maintenance, such as scrubbing and buffing machines.

Properties

- Extremely hardwearing
- Ready to use and to be placed under load
- No or minimal business interruption
- Hygienic (HACCP by means of a PVC welding wire)
- Easy to clean and maintain
- Can be placed under heavy load, such as shopping trolleys or pallet trucks
- Optimum sound insulation and acoustic improvement
- Non-slip
- Ergonomic
- Modern, contemporary look
- Large selection of designs that can be mixed and matched
- Good size 610 x 610 x 10 mm

Applications

- Supermarkets
- Construction markets
- Shops
- Showrooms
- Offices
- Catering
- Leisure centres
- Petrol stations
- Public buildings
- Museums
- Lobbies + indoor galleries
- Particulier gebruik


Installation

The tiles have a special, invisible click connection system for easy installation of new floors without the need for adhesive. This flooring system is ideal for installation by the company's own staff and can be installed at a time which is most convenient for you. The installation can be done in various phases to avoid any disruption to your day-to-day operations: so you're saving money twice over!

Technical data

Connection	Click connection (invisible)
Dimensions	610 x 610 mm
Thickness	10 mm
Weight	5,4 kg per tile
Material	Carrier: recycling PVC (manufactured conform REACH and CE standards) Top layer: design vinyl
Optics	Concrete or natural stone design
Toughness	92 Shore A
Non-slip	DS
Fire performance	B1fl-S1 Does not readily catch fire
Suitable for underfloor heating	Yes
Thermally weldable	Yes with 4 mm welding rod
Plasticizer exudation	Rubber tyres or caps can cause brown staining to coloured tiles, as can certain herbs or spices in foodstuffs.
Accessories	Canted/transition profile, Skirting

Colours

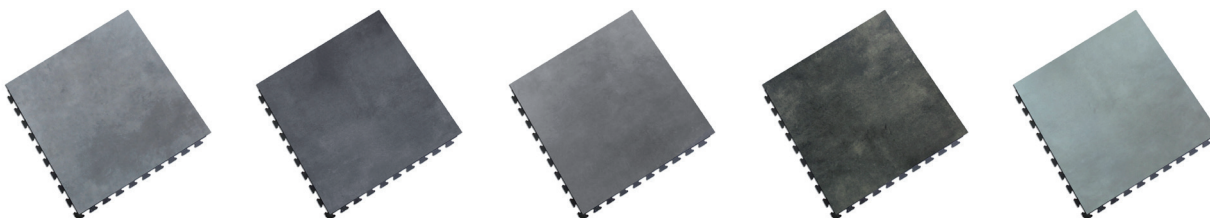

More information?

If you would like more information about us or our products, please contact us on telephone number (+31)045-5322277 or send us an email: info@bofloor.biz



a Havikweg 17
6374 AZ Landgraaf (NL)

Industrial Area Abdissenbosch
Parkstad 3381

t (+31)045-5322277
e info@bofloor.biz

www.pvctegelshop.nl
www.pvctegel.nl